


Assembly Procedure : AP001

The assembly procedure is given on its own separate instruction sheet. Please request the above AP number.

Stripping Dimensions



- a = 4.0 mm
- b = 8.0 mm
- c = 18.0 mm
- d = 14.0 mm

N TYPE 4 HOLE FLANGE RG58

25-278-B3-AH

Suitable for Cables:

RG58, RG141, LMR195, URM43, URM76, WBC195, PSF 1/6, KX15, KX23

Electrical Specification

Impedance: 50 Ohm
 Frequency: 0-10 GHz (Cable Limited)
 Dielectric W/V: 1500 Veff
 Insulation res: 5000 M-Ohm

Mechanical Specification

Centre contact retention
 Axial Force: 10 N min
 Cable Retention: 150 N min
 Mating cycles: 250
 Weight: 41.94 g


Environmental Specification

Operating Temp: -55 to +155 Deg C.

Tooling

Centre Contact: Hex 2.54mm A/F
 Tool No: 336G
 Crimp Sleeve: Hex 5.41mm A/F
 Tool No: 336G

FLANGE DETAILS

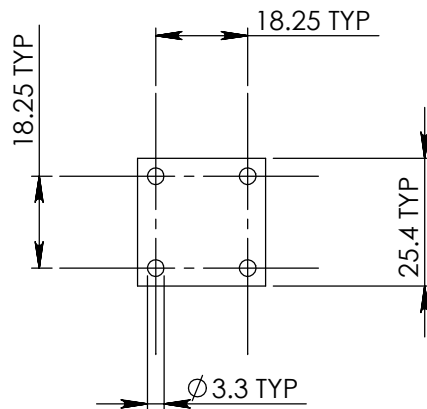

6	FERRULE	BRASS	NICKEL
5	CENTRE CONTACT	PhBr	GOLD
4	REAR BODY	BRASS	NICKEL
3	WASHER	Fe	NICKEL
2	INSULATOR	DELFIN	N/A
1	BODY	BRASS	NICKEL

ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETERS	
REVISION :	A02	NAME	SIGNATURE
ISSUE :	1	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D	



THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

© 2011. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT