

© 2008, THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

WEBSITE VIDEO No.

Electrical Specification

Impedance: 75 Ohm
 Frequency: TBC
 Dielectric W/V: 1500 Veff
 Insulation res: 5000 M-Ohm

Mechanical Specification


Centre contact retention
 Axial Force: TBC
 Cable Retention: N/A
 Mating cycles: 100

Environmental Specification

Operating Temp: TBC




Tooling

Centre Contact: SOLDER
 COAX Tool No: Not Applicable
 Crimp Sleeve: Not Applicable
 COAX Tool No: Not Applicable

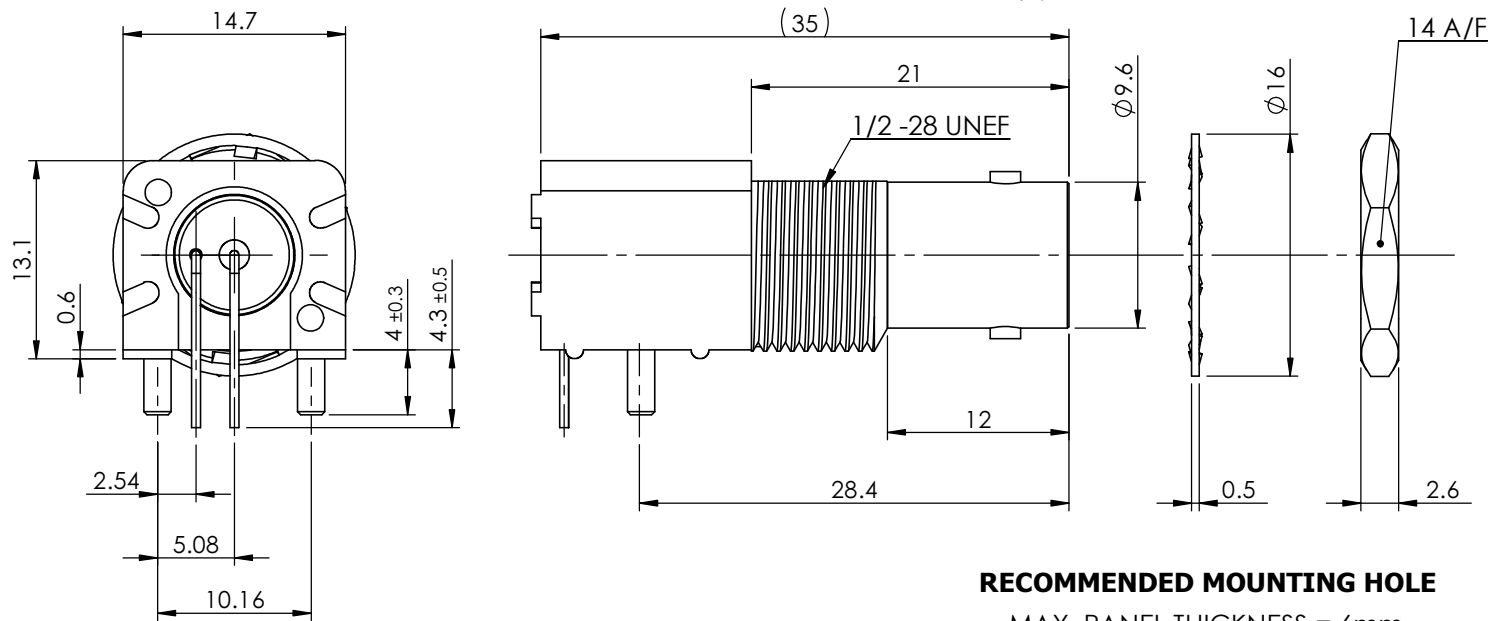

RECOMMENDED MOUNTING HOLE
 MAX. PANEL THICKNESS = 6mm.

PCB MOUNTING DIMENSIONS

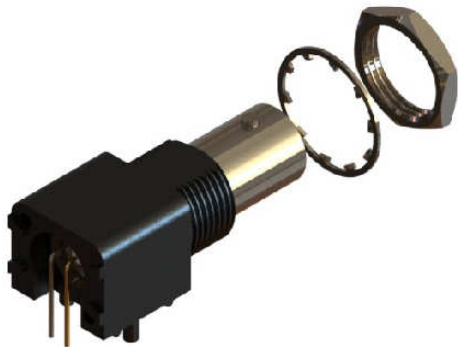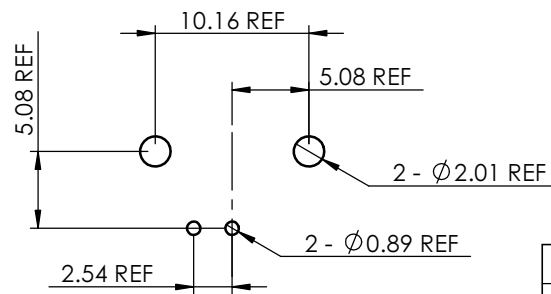

8	SOLDER LEG	SILVER COPPER ALLOY WIRE	TIN
7	HOUSING	PBT	BLACK
6	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
5	INSULATOR	POLYETHYLENE	N/A
4	WASHER	STEEL	NICKEL
3	NUT	BRASS	NICKEL
2	BODY	ZINC	NICKEL
1	MOUNTING LEGS	PHOSPHOR BRONZE	TIN
ITEM	DESCRIPTION	MATERIAL	PLATING

		COAX CONNECTORS LTD 6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR	REVISION A00
Description	75 OHM BNC RIGHT ANGLE PCB MOUNT BULKHEAD JACK		
Part Number	10-471-K6		

A4	DIMENSIONS ARE IN MILLIMETERS		
	NAME	SIGNATURE	DATE
	DRAWN	GE	22/04/2009
	CHK'D	DC	22/04/2009
APPV'D			
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			