

© 2008, THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD., REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

WEBSITE VIDEO No.

**Electrical Specification**

Impedance: 50 Ohm  
 Frequency: 0 - 4 GHz  
 Dielectric W/V: 1000 Veff  
 Insulation res: 1000 M-Ohm

**Mechanical Specification**




Centre contact retention  
 Axial Force: 10N  
 Cable Retention: N/A  
 Mating cycles: 500

**Environmental Specification**

Operating Temp: -55 to +155 Deg C

**Tooling**

Centre Contact: N/A  
 COAX Tool No:  
 Crimp Sleeve: N/A  
 COAX Tool No:

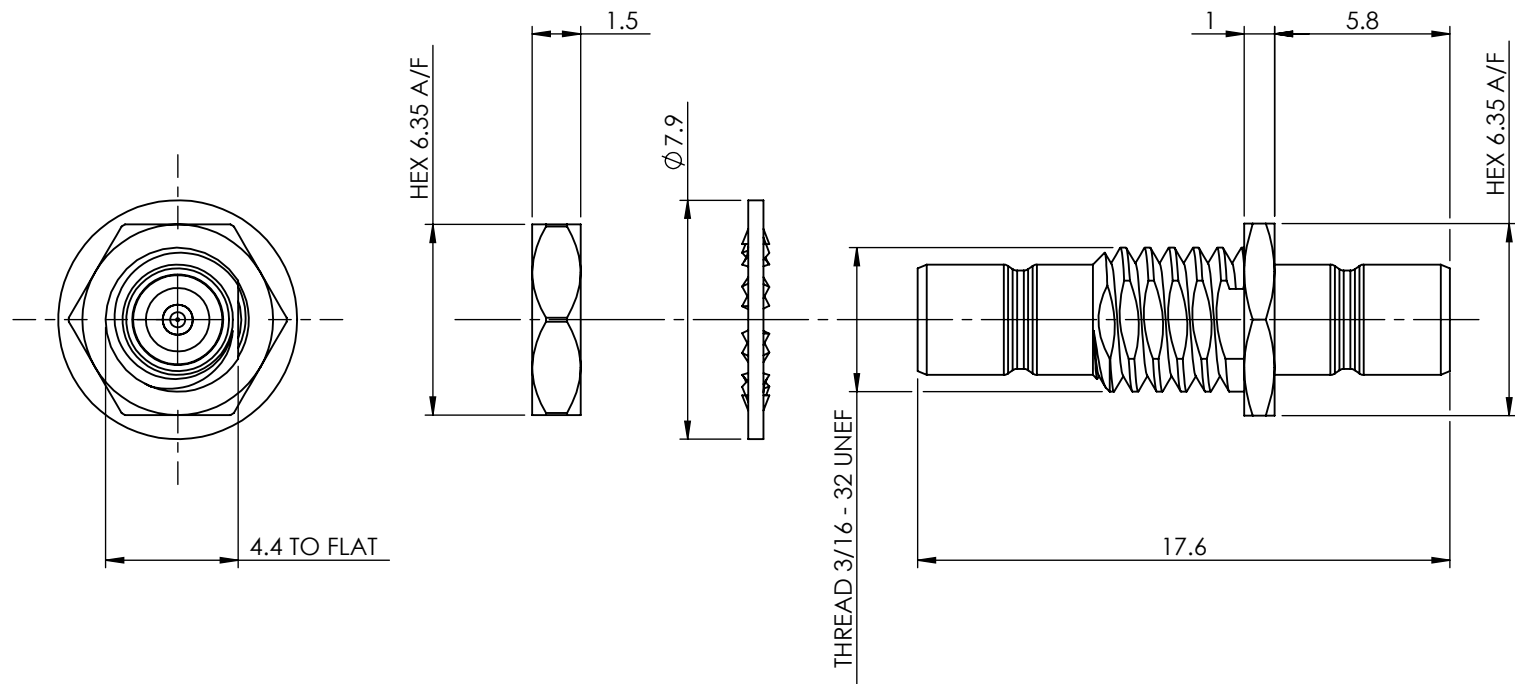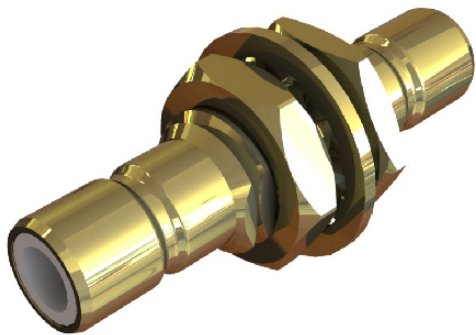

RECOMMENDED MOUNTING HOLE

DO NOT SCALE DRAWING



**COAX CONNECTORS LTD**  
 6-8 COLNE ROAD, TWICKENHAM,  
 MIDDLESEX. TW1 4JR

**Description** SMB JACK - JACK B/H ADAPTOR

**Part Number** 32-501-D3

REVISION : A00  
 ISSUE : 1

DIMENSIONS ARE IN MILLIMETERS			
A4	NAME	SIGNATURE	DATE
DRAWN	GE		01/11/2010
CHK'D	IG		01/11/2010
APPV'D			

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

ITEM	DESCRIPTION	MATERIAL	PLATING
5	NUT	BRASS	GOLD
4	WASHER	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	GOLD